



## CALIFORNIA AIR TOOLS 5020W Powerful 2.0 Hp Ultra Quiet & Oil-Free Rugged Air Compressor



Large 7.6" Heavy-Duty Flatless Wheels

70 dB Noise Level

110v 60hz

2.0 HP  
(Rated/Running)

5.0 Gallon Steel Tank

6.40 CFM @ 40  
PSI

5.30 CFM @ 90 PSI


The CALIFORNIA AIR TOOLS 5020W Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.

## 70 Decibels

Adjustable Handle Height  
From 19.5 in. to 27.5 in.



**82 lbs. 110 Volts 60 hz**

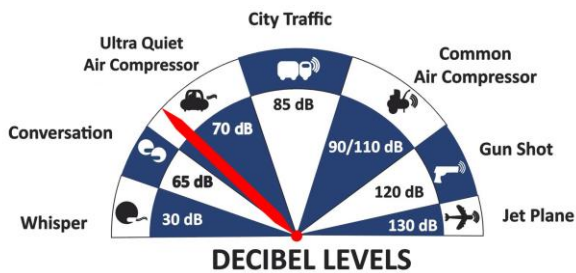

The Powerful 2.0 HP (SP-9421) motor operates at only 1680 RPM creating less noise and less wear. Motor has been designed to increase duty cycle and allow for longer continuous run times. \*

ULTRA QUIET

ONLY 70 DB NOISE LEVEL


The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 5.0 Gallon Steel Air Compressor is only 82 pounds, making it very easy to move around the jobsite and is lighter and quieter than all competitive models in the same class.

Designed for the person looking for Rugged Durability, Power, Air Flow, Less Service and Maintenance with at Least 30% Less Noise!


EASY START VALVE

The Easy Start Valve feature allows for an easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the SP-9421 motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

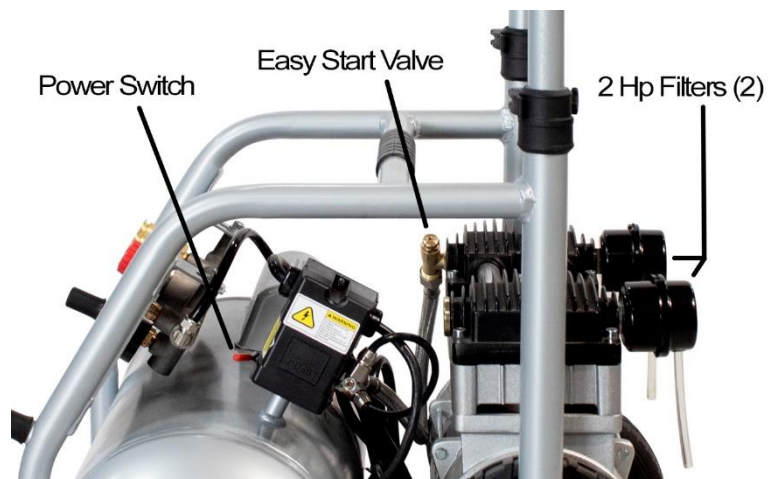

FEATURES

Large 7.6" Heavy Duty  
Flatless Wheels

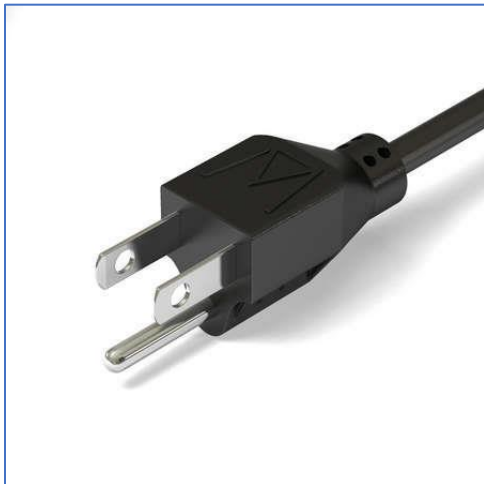



- \* **Ultra Quiet** - Only **70 decibels**
- \* Oil-Free Pump - Cleaner air for better tool operation.  
Less maintenance and Costs.
- \* Protective Roll Cage
- \* Telescope Handle for adjustable height: 19.5" To 27.5"
- \* Easy to Lift and Easy to move around on Job Sites
- \* Large Rugged Flatless Wheels (7.6")
- \* Two pressure control gauges
- \* Two - Female industrial "Push to Connect" quick connectors
- \* Easy Start Valve - For Less Starting Amperage
- \* Thermal Overload Protector
- \* 135 PSI Maximum Pressure
- \* 110v / 60 hz
- \* Low Amp Draw - 14 Amps
- \* Dedicated 15-amp outlet -14-gauge 25ft cord - Min. 5500-Watt Generator
- \* Time to fill tank from empty to full - 60 Seconds
- \* Recovery time from 95 PSI to 125 PSI - 20 Seconds
- \* SP-9421 2 hp Motor-Pump (110v 60 hz)
- \* Duty Cycle - 70/30\*
- \* Less heat which dissipates more efficiently (longer motor life)
- \* L (19.0") x W/D (21") x H (19.5" To 27.5")
- \* 82 lbs
- \* 1 Year Limited Warranty
- \* Comes complete Two Air Filters
- \* UL Certification pending
- \* Commercial Use: Refer to State & City Codes

For more information please visit California Air Tools: <https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/2-0-hp-air-compressors/cat-5020w/>

*Manufactured in Mexico using global components.*

*MODEL: 5020W*

*PART NUMBER: CAT-5020W*

*[www.californiaairtools.com](http://www.californiaairtools.com)*

*Revision A: 06-2024*