



CALIFORNIA AIR TOOLS 20040DCADC Powerful 4.0 Hp Ultra Quiet, Ultra Dry & Oil-Free Air Compressor with 98% Air Drying System and Automatic Drain Valve

20 Gallon


4 HP Motor

125 PSI MAX

10.6 CFM @90PSI

75 Decibels

98% Dry Air



Automatic Drain Valve

**4.0 HP
(Rated/Running)**

20 Gallon Steel Tank

Air Dryer Cartridge System - Up to 98% Dry Air

12.80 CFM @ 40 PSI

10.60 CFM @ 90 PSI

220 Volts / 60 Hertz / Single Phase

The CALIFORNIA AIR TOOLS 20040DCADC Ultra Quiet, Ultra Dry Oil-Free Air Compressor with Air Drying System is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 75 decibels of sound.

75 DECIBELS

Industrial Female Quick Connect

Regulated Pressure Gauge

Tank Pressure Gauge

Output Pressure Regulator

4 Hp Oil-Free Dual-Piston Long-Life Motor-Pump with Condor Pressure Switch

Air Dryer System

20 Gallon Steel Air Tank




192 lbs.

220 Volts,

14 Amps



The Powerful Twin 2.0 HP (SP-9421-22060) motors operate at only 1680 RPM creating less noise and less wear.

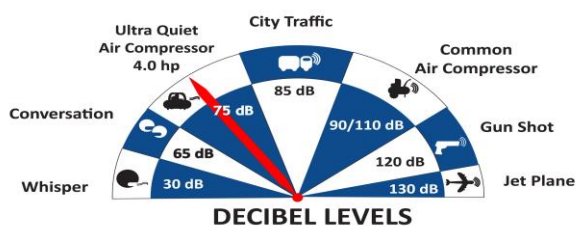

ULTRA QUIET

ONLY 75 DB NOISE LEVEL

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-20040DCADC Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 20 Gallon Steel Air Tank is just the right size for a shop or garage.

98% AIR DRYER SYSTEM

To dry the air from the air compressor an Aftercooler and 98% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.



The easy to replace "Spin-On" Air Dryer Cartridge has a regenerating High-Temperature Molecular Sieve Desiccant to dry the air.

This cartridge dryer has a life of 2-years before replacement.





Ultra-Quiet Motor/Pump Only 75 Decibels

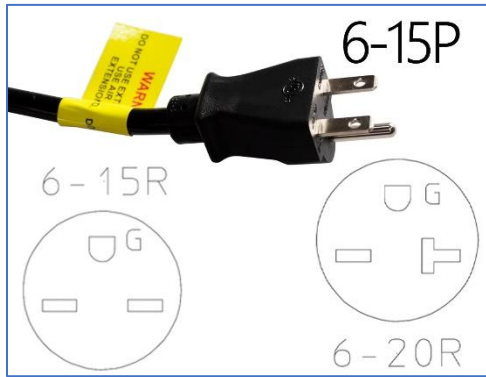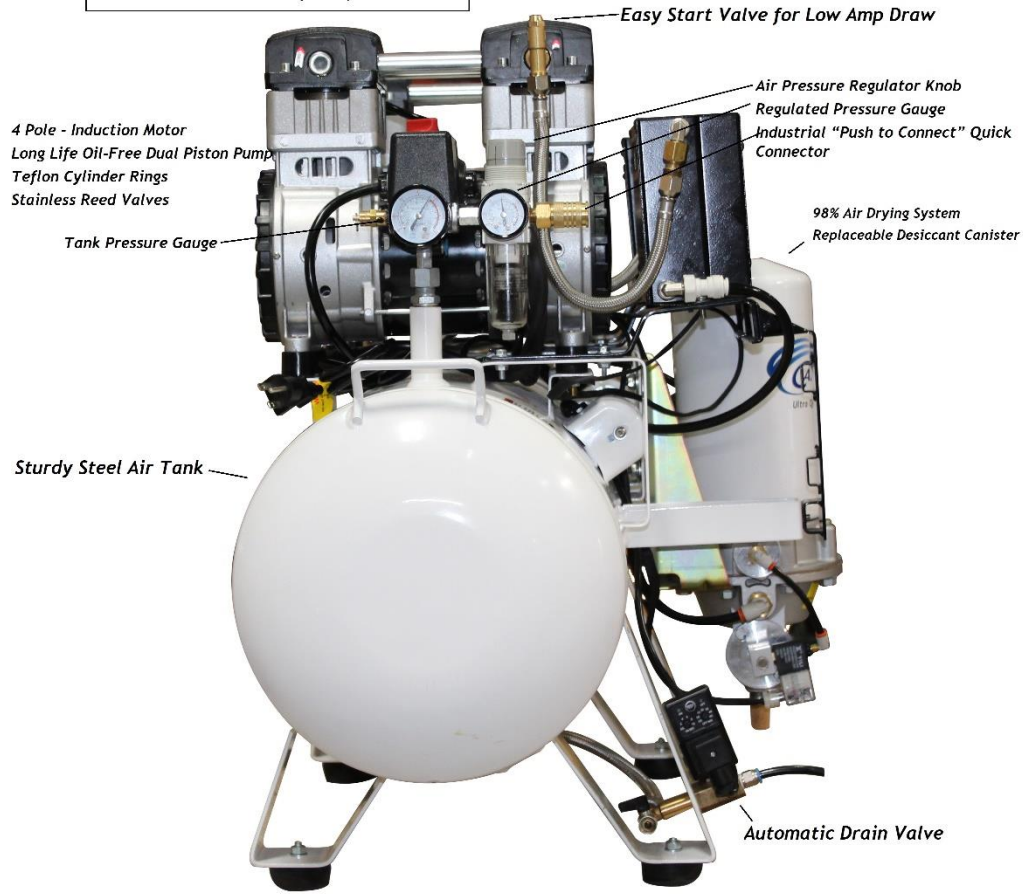

FEATURES

- * **Ultra Quiet** - Only **75 decibels**
- * Oil-Free Pump (Class 1) - Cleaner air for better tool operation.
Less maintenance and Costs.
- * 0.01 Micron Prefilters (2 total)
- * 5.0 Micron (Class 2) Air Filter Regulator
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 220 Volts / 60 Hertz / Single Phase - (No 208 Volts - if necessary, obtain 208 to 220 voltage booster)
- * Low Amp Draw - 14 Amps
- * Time to fill tank from empty to full - 150 Seconds
- * Recovery time from 95 PSI to 125 PSI - 40 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank
- * L (37.1") x W/D (22") x H (30.5")
- * 170 lbs
- * Air Dryer Cartridge uses a High-Temperature Molecular Sieve Desiccant
Easy to remove (spin off) and replace every 2 years.
- * Aftercooler (condenser)
- * PDP performance range (-20' F. to -51' F.)
- * Air Quality: ISO 8573 - Class 2.3.1
- * 1 Year Limited Warranty
- * Comes complete (4) Air Filters
- * Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
- * EZ-1-2321 Auto Drain Valve Factory Installed
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * Assembled in USA with global components

For more information and to watch a 20040DCADC product demonstration please visit California Air Tools: <https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-20040dcadc/>

Manufactured in Mexico using global components.

MODEL: 20040DCADC

PART NUMBER: CAT-20040DCADC

www.californiaairtools.com

Revision A: 07-2024