




CALIFORNIA AIR TOOLS 20060DCC Powerful 6.0 Hp Ultra Quiet, Ultra Dry & Oil-Free Air Compressor with 98% Air Drying System

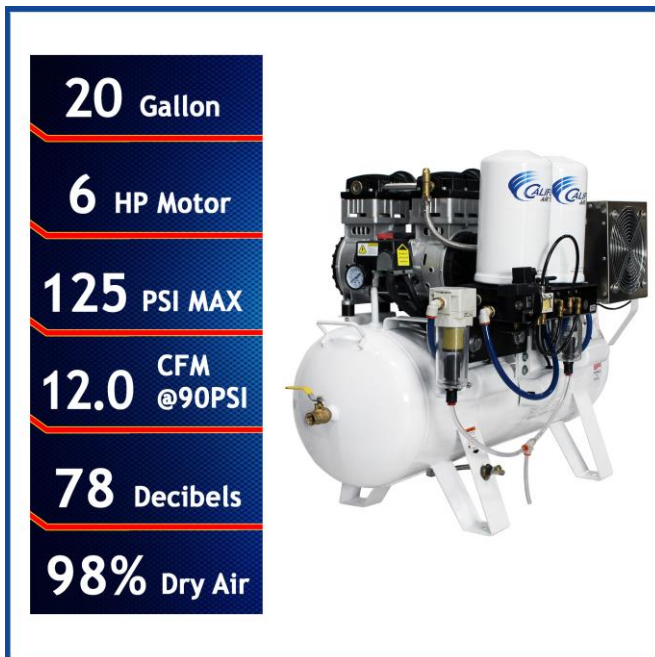

20 Gallon

6 HP Motor

125 PSI MAX

12.0 CFM @90PSI

78 Decibels

98% Dry Air

6.0 HP
(Rated/Running)

20 Gallon Steel Tank


Air Dryer Cartridge System - Up to 98% Dry Air


16.30 CFM @ 40 PSI

12.00 CFM @ 90 PSI

220 Volts / 60 Hertz / Single Phase / 24 Amps

The CALIFORNIA AIR TOOLS 20060DCC Ultra Quiet, Ultra Dry Oil-Free Air Compressor with 98% Air Drying System is designed to be one of the quietest 6.0 Hp air compressors in the industry having only 78 decibels of sound.

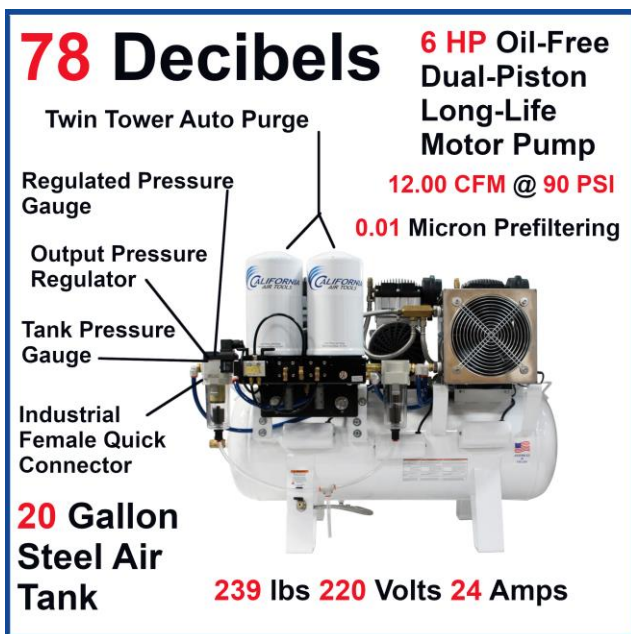

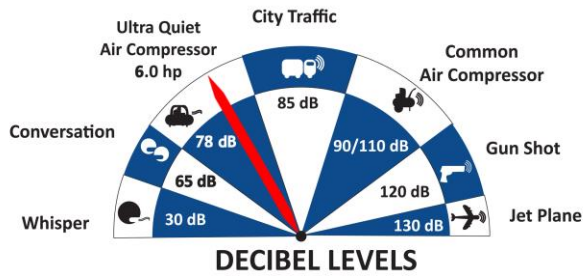

The Powerful (3) 2.0 HP (SP-9421-22060) motors operate at only 1680 RPM creating less noise and less wear.

ULTRA QUIET

ONLY 78 DB NOISE LEVEL

The Powerful (3) 2.0 HP (SP-9421-22060) motors operate at only 1680 RPM creating less noise and less wear.

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-2006DCC Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and eliminates oil from being in the air.

98% AIR DRYER SYSTEM


To dry the air from the air compressor an Aftercooler and 98% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.

The easy to replace "Spin-On" Air Dryer Cartridge has a regenerating High-Temperature Molecular Sieve Desiccant to dry the air.

This cartridge dryer has a life of 2-years before replacement.



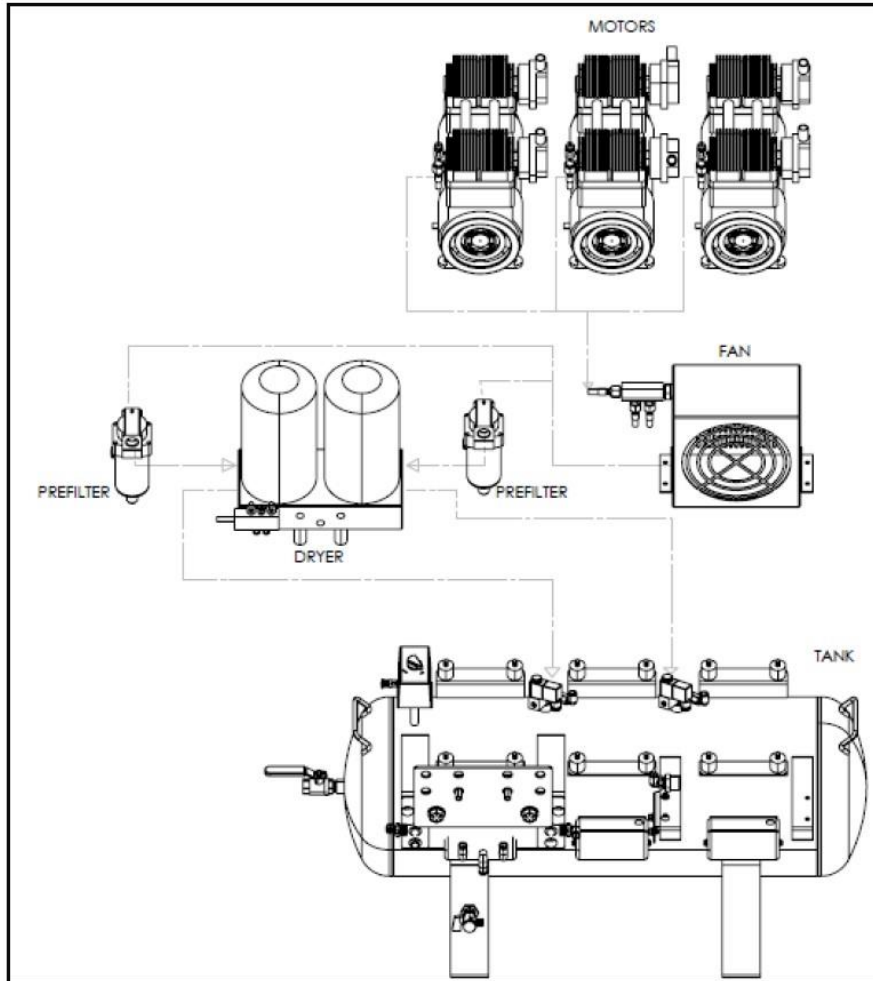

FEATURES

- * **Ultra Quiet** - Only **78 decibels**
- * Oil-Free Pump (Class 1) - Cleaner air for better tool operation.
Less maintenance and Costs.
- * 0.01 Micron Prefilters (2 total)
- * 1/2" NPT female port
No output pressure regulator, quick connector or air hose included.
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 220 Volts / 60 Hertz / Single Phase - (No 208 Volts - if necessary, obtain 208 to 230 voltage booster)
- * Amp Draw - 24 Amps (operating average 18-20 Amps)
- * 30 Amp Breaker Required
- * Time to fill tank from empty to full - 93 Seconds
- * Recovery time from 95 PSI to 125 PSI - 32 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank
- * L (44") x W/D (24") x H (30")
- * 239 lbs
- * Air Dryer Cartridge uses two (2) High-Temperature Molecular Sieve Desiccant Towers
Easy to remove (spin off) and replace every 2 years.
- * Aftercooler (condenser)
- * PDP performance range (-20' F. to -51' F.) *
- * Air Quality: ISO 8573 - Class 2.3.1
- * 1 Year Limited Warranty
- * Comes complete (6) Air Filters
- * Plug Type: Nema L6-30P
- * Cord Length: 7ft
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * Assembled in USA with global components

For more information and to watch a 20060DCC product demonstration please visit California Air Tools:
<https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-20060dcc/>

Manufactured in Mexico using global components.

MODEL: 20060DCC

PART NUMBER: CAT-20060DCC

www.californiaairtools.com

Revision A: 07-2024