



**CALIFORNIA AIR TOOLS 8010DSPC-H 8 Gallon, 1.0 Hp Ultra Quiet & Oil-Free Air Compressor with 80% Air Dryer, Aftercooler in Sound Proof Cabinet and 10' Drain Tubing**

**8** Gallon

---

**1** HP Motor

---

**115** PSI MAX

---

**3.0** CFM @90PSI

---

**40** Decibels

---

**80%** Dry Air



*Drain Valve & 8mm PTFE Drain Tubing*



**1.0 HP (Rated/Running)**

**10 Gallon Steel Tank**

**4.00 CFM @ 40 PSI**

**3.00 CFM @ 90 PSI**

**80% Air Drying System**

The CALIFORNIA AIR TOOLS 8010DSPC-H Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 1.0 Hp air compressors in the industry having only 40 decibels of sound.

40

Decibels

1 Hp Oil-Free Dual-Piston Long-Life Motor-Pump

Tank Pressure Gauge

Regulated Pressure Gauge


Pressure Regulator Knob

Industrial Female Quick Connect



8 Gallon Steel Air Tank with Air Dryer in Sound-Proof Cabinet

156 lbs. 110 Volts, 7.6 Amps

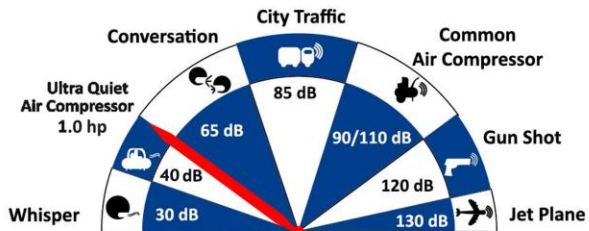

The powerful 1.0 HP motor operates at only 1400 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 40 DB NOISE LEVEL

The CAT-MP100LF Motor/Pump is tested for a minimum pump life of 4000 hours before service. 30% more life before repair.

The large 8.0 gallon steel air tank is internally coated with epoxy to prevent any corrosion.

The complete Sound Proof Cabinet is 157 lbs.

This air compressor is ideal for anyone working inside (office, shop, store, warehouse or home) where noise is a major issue.

## 80% AIR DRYER SYSTEM

The 80% Air Dryer is specially designed to remove water vapor from the air to protect sensitive tools and machinery.

To dry the air from the air compressor an Aftercooler and 80% Air Dryer are utilized.



The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.





80% Air Drying System  
Replaceable Desiccant

Ultra-Quiet Motor/Pump  
Only 40 decibels

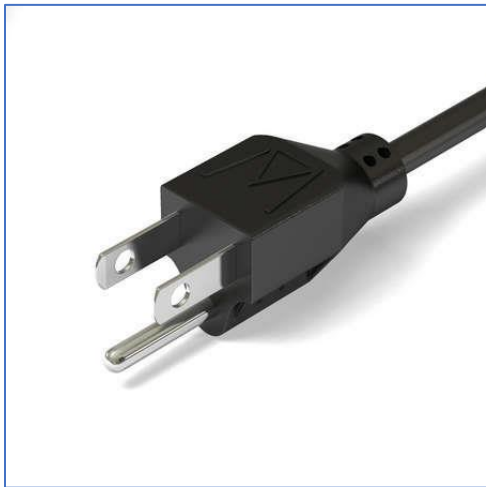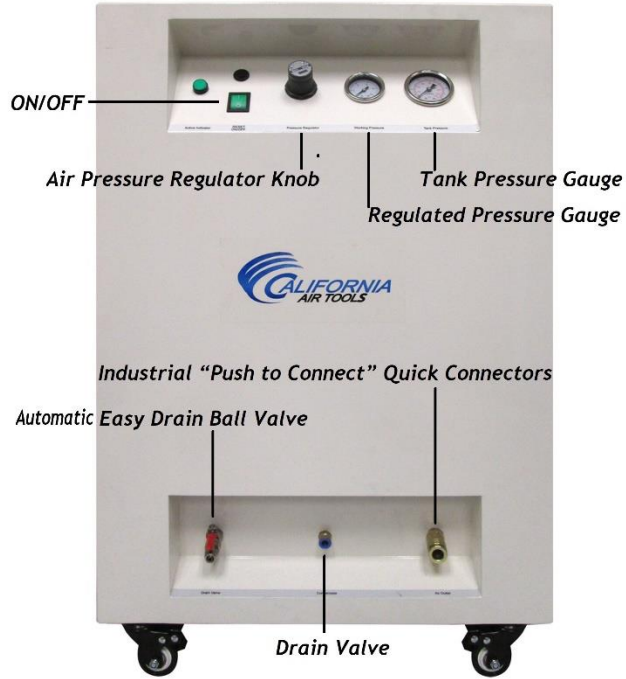

## FEATURES

- \* **Ultra Quiet** - Only 40 decibels
- \* Oil-Free Pump - Cleaner air for better tool operation. Less maintenance and Costs.
- \* 8.0 gallon steel tank (internally epoxy coated to prevent rusting)
- \* Sound proof cabinet with swivel wheels, air dryer and aftercooler for dry air delivery (fully insulated)
- \* Two pressure control gauges
- \* One - Female industrial "Push to Connect" quick connector
- \* 8mm PTFE black drain tubing, 10'
- \* Thermal Overload Protector
- \* 115 PSI Maximum Pressure
- \* Kick On Pressure 85 PSI - Kick Off Pressure 115 PSI
- \* 110v / 60 Hz
- \* Low Amp Draw - Only 7.6 Amps
- \* Commercial Use: Refer to State & City Codes
- \* Tank fill rate from empty to full 3.15 minutes
- \* Duty Cycle - 70/30\*
- \* L (21") x W (26") x H (32")
- \* 157 pounds
- \* Non-ASME Air Tank
- \* 18 Month Limited Warranty
- \* Air Dryer - Includes Activated Alumina desiccant with a 4000 hour life.  
Activated Alumina is used in air prepurification (due to it's high water capacity) and adsorption of sulphur compounds and carbon dioxide adsorption
- \* Aftercooler (condenser)
- \* Heavy Duty Sound Proof Cabinet
- \* 4 Caster Swivel Wheels
- \* Commercial Use: Refer to State & City Codes

For more information and to watch a 8010DSPC-H product demonstration please visit California Air Tools: <https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-8010dspc-h/>

*Manufactured in Mexico using global components.*  
MODEL: 8010DSPC-H  
PART NUMBER: CAT-8010DSPC-H  
[www.californiaairtools.com](http://www.californiaairtools.com)  
Revision A: 07-2024