



CALIFORNIA AIR TOOLS 10020CHAD-22060 Powerful 2.0 Hp Ultra Quiet, Oil-Free Air Compressor with Automatic Drain Valve



70 dB Noise Level

220v 60hz


2.0 HP
(Rated/Running)


10 Gallon Steel
Horizontal Air Tank

6.40 CFM @ 40
PSI

5.30 CFM @ 90 PSI

The CALIFORNIA AIR TOOLS 10020CHAD-22060 Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.

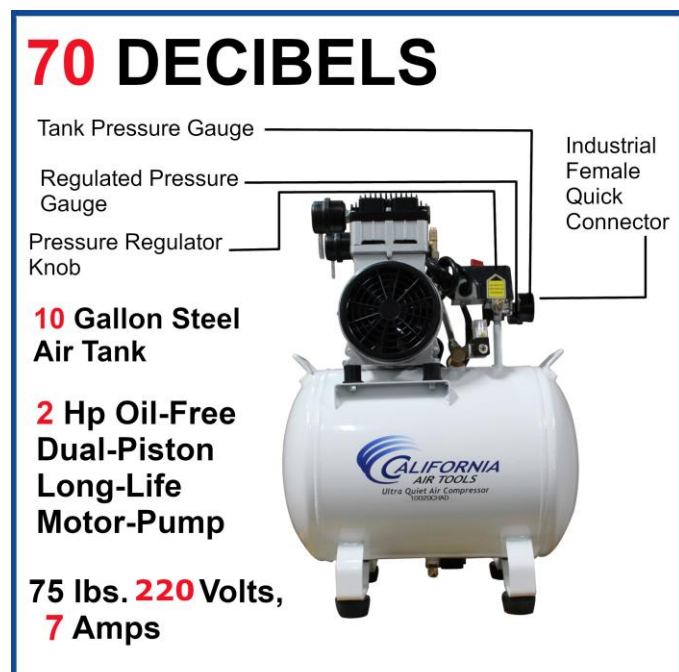

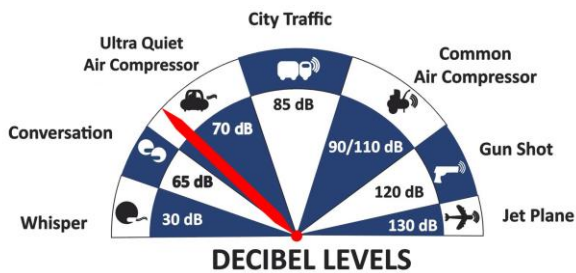

The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 70 DB NOISE LEVEL

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-10020CHAD-22060 Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large low profile 10 Gallon Steel Horizontal Air Tank makes storing under a bench, desk or shelf very easy.

Designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 30% Less Noise!


AUTOMATIC DRAIN VALVE

The factory installed California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank. The manually set timer allows you to set the time for both the frequency and duration of the draining process.

The 10020CHAD-22060 model is ideal for placement on or under a shelf; the automatic drain valve supports required maintenance by removing water from the air tank on a regular basis.

The 10020CHAD-22060 is designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 30% Less Noise!



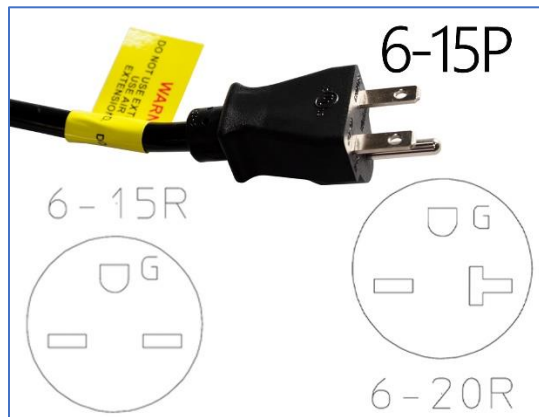

FEATURES

- * **Ultra Quiet** - Only **70 decibels**
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Easy Start Valve - For Less Starting Amperage
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 220v / 60 hz / Single Phase (No 208 Volts - if necessary, obtain 208 to 220 voltage booster)
- * Low Amp Draw - 7.5 Amps
- * Generator with 3000 Running Watts
- * Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
- * Time to fill tank from empty to full - 120 Seconds
- * Recovery time from 95 PSI to 125 PSI - 25 Seconds
- * Duty Cycle - 70/30*
- * Maximum continuous running 30-60 min. (Depending PSI & CFM)
- * Less heat which dissipates more efficiently.
- * 10 Gal.Steel (Low Profile) Horizontal Air Tank
- * EZ-1-2321 Auto Drain Valve Factory Installed
- * L (19") x W/D (15") x H (26.5")
- * 75 lbs
- * Non-ASME Air Tank
- * 1 Year Limited Warranty
- * Comes complete Two Air Filters
- * Assembled in USA with global components
- * Commercial Use: Refer to State & City Codes

For more information and to watch a 10020CHAD-22060 product demonstration please visit California Air Tools: <https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/2-0-hp-air-compressors/cat-10020chad-22060/>

Manufactured in Mexico using global components.

MODEL: 10020CHAD-22060

PART NUMBER: CAT-10020CHAD-22060

www.californiaairtools.com

Revision A: 07-2024