



CALIFORNIA AIR TOOLS 15020C-22060 Ultra Quiet, Oil-Free and Powerful 2.0 Hp Air Compressor



2.0 HP
(Rated/Running)

15 Gallon Steel Tank

6.40 CFM @ 40 PSI


5.30 CFM @ 90 PSI

100 - 130 PSI
Operating Range!

220 Volt 60 Hertz

The CALIFORNIA AIR TOOLS 15020C-22060 Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.



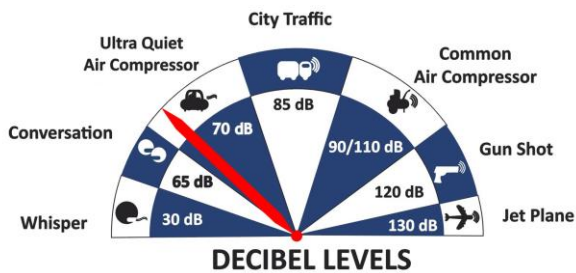

The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 70 DB NOISE LEVEL

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-15020C-22060 Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).


The large 15 Gallon Steel Air Tank with wheel kit makes it very easy to move around the jobsite, shop or garage.

Designed for the person looking for Power, Air Flow, Less Service and Maintenance with at Least 30% Less Noise!

EASY START VALVE

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

Easy Start Valve

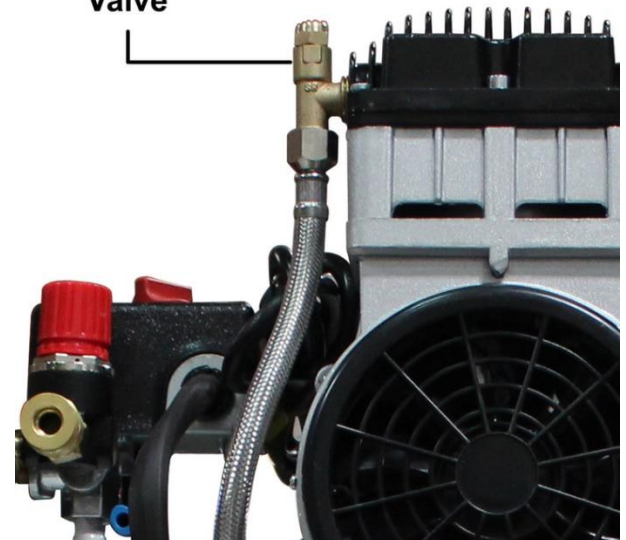




15020C ULTRA QUIET & OIL FREE AIR COMPRESSOR


**Ultra Quiet
Only 70 Decibels!**

15020C is Designed for High Performance, Reliability and to be one of the Quietest Air Compressors in the Industry

2.0 HP Motor (Rated/Running)
15.0 Gallon Steel Tank
6.40 CFM @ 40 PSI
5.30 CFM @ 90 PSI

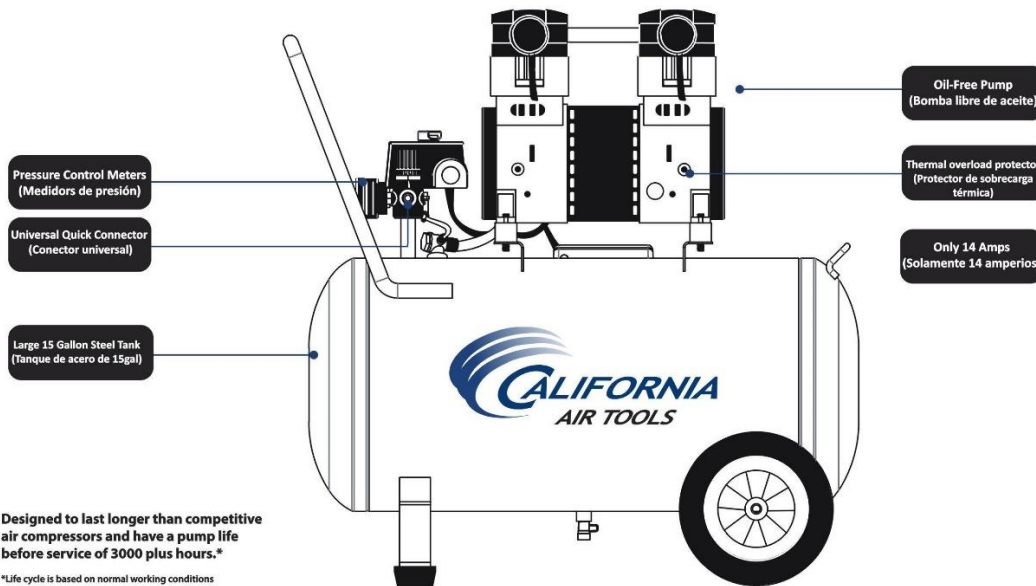

ULTRA QUIET - OIL-FREE - LONG LIFE - LESS MAINTENANCE

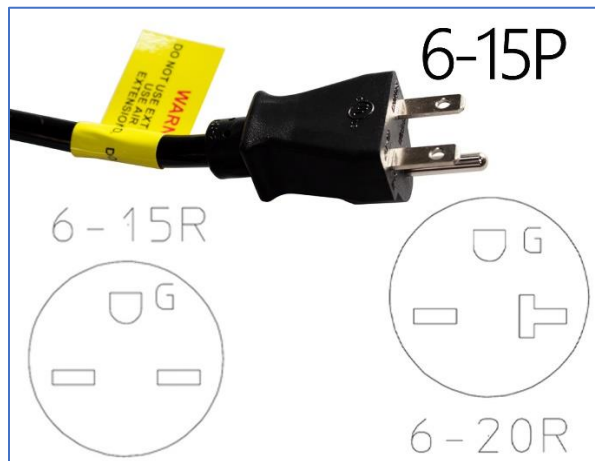

FEATURES

- * **Ultra Quiet** - Only 70 decibels
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Easy Start Valve - For Less Starting Amperage
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 130 PSI Maximum Pressure
- * 220v / 60 hz / Single Phase (No 208 Volts - if necessary, obtain 208 to 220 voltage booster)
- * Low Amp Draw - 7.5 Amps
- * Generator with 3000 Running Watts
- * Time to fill tank from empty to full - 230 Seconds
- * Recovery time from 100 PSI to 130 PSI - 50 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 15 Gal. Steel Air Tank with Wheel Kit - pounds and easy to move around.
- * L (28") x W (17") x H (31")
- * 90 lbs
- * Non-ASME Air Tank
- * 1 Year Limited Warranty
- * Comes complete with Wheel Kit & Air Filter
- * Assembled in USA
- * Commercial Use: Refer to State & City Codes
- * Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)

For more information and to watch a 15020C-22060 product demonstration please visit California Air Tools: <https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/2-0-hp-air-compressors/cat-15020c-22060/>

Manufactured in Mexico using global components.

MODEL: 15020C-22060

PART NUMBER: CAT-15020C-22060

www.californiaairtools.com

Revision A: 07-2024