



CALIFORNIA AIR TOOLS 20040CAD Powerful 4.0 Hp Ultra Quiet & Oil-Free Air Compressor, with Automatic Drain Valve



**4.0 HP
(Rated/Running)**

20 Gallon Steel Tank

**12.80 CFM @ 40
PSI**

10.60 CFM @ 90 PSI


**220 Volts / 60 Hertz
/ Single Phase**

The CALIFORNIA AIR TOOLS 20040CAD Ultra Quiet & Oil-Free Air Compressor with Automatic Drain Valve is designed to be one of the quietest 4.0 Hp air compressors in the industry having only 75 decibels of sound.





The Powerful Twin 2.0 HP (SP-9421-22060) motors operate at only 1680 RPM creating less noise and less wear.

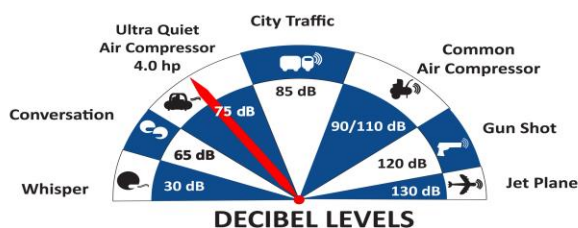

ULTRA QUIET

ONLY 75 DB NOISE LEVEL

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-20040CAD Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 1500 hours or less.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

The large 20 Gallon Steel Air Tank is just the right size for a shop or garage.

Designed for the person looking for Power, Air Flow and Less Service with at Least 30% Less Noise!


EASY START VALVE

Easy Start Valve

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.


EZ-1-2321 Auto Drain Valve Factory Installed

The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank. The manually set timer allows you to set the time for both the frequency and duration of the draining process. (Factory Pre-Set)

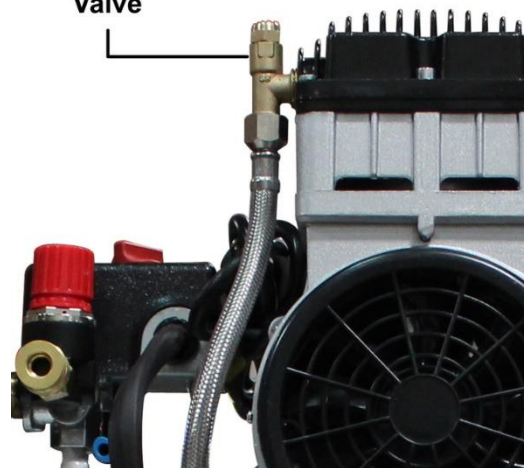



Ultra-Quiet Motor/Pump - Only 75 Decibels

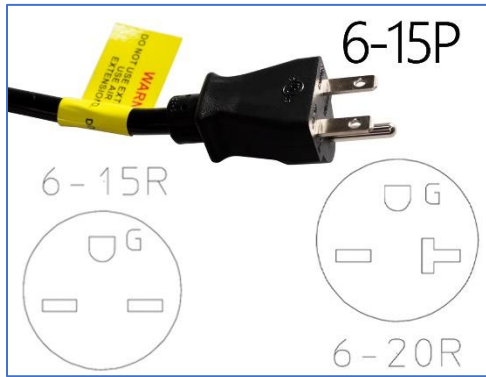

FEATURES

- * **Ultra Quiet** - Only 75 decibels
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female Industrial "Push to Connect" quick connector
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 220 Volt / 60 Hertz / Single Phase (No 208 Volts - if necessary, obtain 208 to 220 voltage booster)
- * Low Amp Draw - 14 Amps
- * Time to fill tank from empty to full - 150 Seconds
- * Recovery time from 95 PSI to 125 PSI - 40 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank - pounds and easy to move around.
- * EZ-1-2301 Auto Drain Valve Factory Installed
The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank.
- * L (39") x W (15") x H (28")
- * 148 lbs
- * 1 Year Limited Warranty
- * Comes complete (4) Air Filters
- * Plug Type: Nema 6-15P (fits Nema 6-15R or 6-20R receptacle)
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * Assembled in USA with Global Components

For more information and to watch a 20040CAD product demonstration please visit California Air Tools:
<https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/4-0-hp-air-compressors/cat-20040cad/>

Manufactured in Mexico using global components.

MODEL: 20040CAD

PART NUMBER: CAT-20040CAD

www.californiaairtools.com

Revision A: 07-2024