



CALIFORNIA AIR TOOLS 8010DSPCAD 8 Gallon, 1.0 Hp Ultra Quiet & Oil-Free Air Compressor with 80% Air Dryer, Aftercooler in Sound Proof Cabinet and Automatic Drain Valve

8 Gallon


1 HP Motor

115 PSI MAX

3.0 CFM @90PSI

40 Decibels

80% Dry Air



Automatic Drain Valve

1.0 HP (Rated/Running)

10 Gallon Steel Tank

4.00 CFM @ 40 PSI

3.00 CFM @ 90 PSI

80% Air Drying System

The CALIFORNIA AIR TOOLS 8010DSPCAD Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 1.0 Hp air compressors in the industry having only 40 decibels of sound.

40

Decibels


1 Hp Oil-Free
Dual-Piston
Long-Life Motor-
Pump

Tank Pressure Gauge

Regulated Pressure Gauge


Pressure Regulator Knob

Industrial Female Quick Connect



8 Gallon
Steel Air
Tank with
Air Dryer in
Sound-Proof
Cabinet

156 lbs. 110 Volts, 7.6 Amps

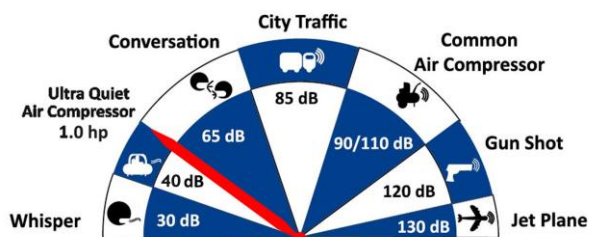

The powerful 1.0 HP motor operates at only 1400 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 40 DB NOISE LEVEL

The CAT-MP100LF Motor/Pump is tested for a minimum pump life of 4000 hours before service. 30% more life before repair.

The large 8.0 gallon steel air tank is internally coated with epoxy to prevent any corrosion.

The complete Sound Proof Cabinet is 157 lbs.


This air compressor is ideal for anyone working inside (office, shop, store, warehouse or home) where noise is a major issue.

80% AIR DRYER SYSTEM

The 80% Air Dryer is specially designed to remove water vapor from the air to protect sensitive tools and machinery.

To dry the air from the air compressor an Aftercooler and 80% Air Dryer are utilized.

The aftercooler is a heat exchanger for cooling the discharge air from the air compressor. The water vapor from the compressed air is condensed into liquid form and pushed into the Air Dryer.

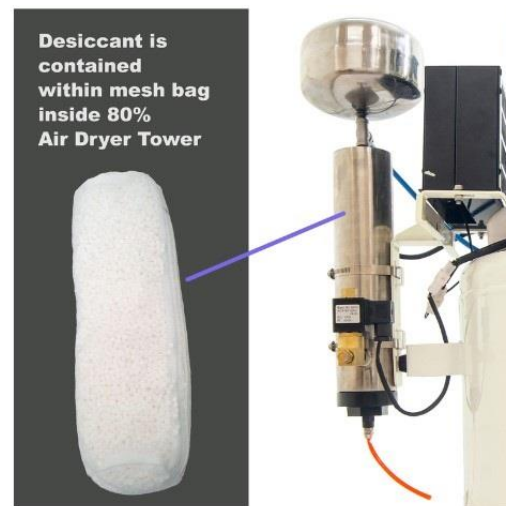

AUTOMATIC DRAIN VALVE





8010DSPCAD
AUTOMATIC DRAIN VALVE
(connect drain tube)

The California Air Tools EZ-1 Automatic Drain Valve has been designed to eliminate manually draining your air compressor air tank. The manually set timer allows you to set the time for both the frequency and duration of the draining process.



80% Air Drying System
Replaceable Desiccant

Ultra-Quiet Motor/Pump
Only 40 decibels

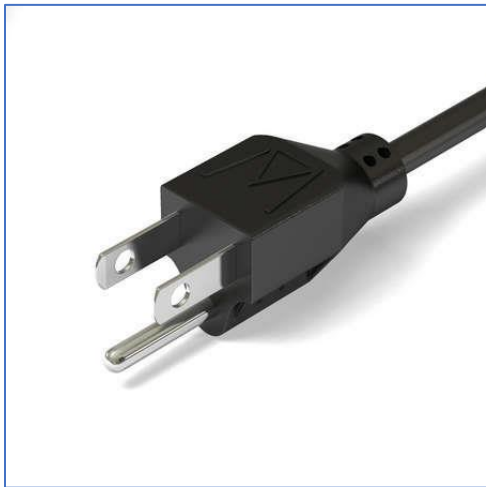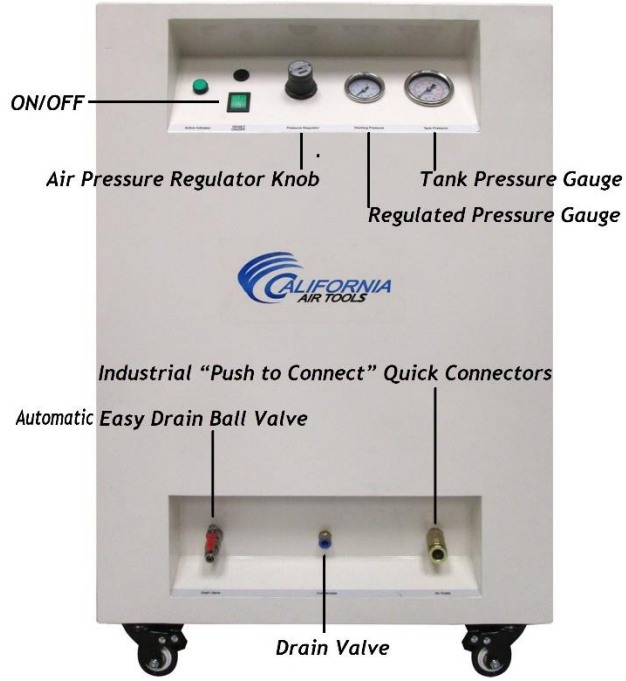

FEATURES

- * Ultra Quiet - Only 40 decibels
- * Oil-Free Pump - Cleaner air for better tool operation. Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector
- * Thermal Overload Protector
- * 115 PSI Maximum Pressure
- * Kick On Pressure 85 PSI - Kick Off Pressure 115 PSI
- * 110v / 60 Hz
- * Low Amp Draw - Only 7.6 Amps
- * Commercial Use: Refer to State & City Codes
- * Tank fill rate from empty to full 3.15 minutes
- * Duty Cycle - 70/30
- * Maximum continuous running 30-60 min. (Depending PSI & CFM)
- * L (21") x W (26") x H (32")
- * 157 pounds
- * Air Dryer - Includes Activated Alumina desiccant with a 4000 hour life.
Activated Alumina is used in air prepurification (due to it's high water and carbon dioxide adsorption capacity)
and adsorption of sulphur compounds.
- * Aftercooler (condenser)
- * EZ-1-2321 Auto Drain Valve Factory Installed
- * Sound Proof Cabinet
- * 4 Caster Swivel Wheels
- * Non-ASME Air Tank
- * Commercial Use: Refer to State & City Codes
- * 18 Month Limited Warranty

For more information and to watch a 8010DSPCAD product demonstration please visit California Air Tools: <https://www.californiaairtools.com/air-dryer-ultra-quiet-oil-free-air-compressors/cat-8010dspc/>

Manufactured in Mexico using global components.

MODEL: 8010DSPCAD

PART NUMBER: CAT-8010DSPCAD

www.californiaairtools.com

Revision A: 08-2024