



CALIFORNIA AIR TOOLS 20020-22060 Ultra Quiet, Oil-Free and Powerful 2.0 Hp Portable Air Compressor



2.0 HP
(Rated/Running)

20 Gallon Steel Air Tank


6.40 CFM @ 40 PSI

5.30 CFM @ 90 PSI

220v 60hz

The CALIFORNIA AIR TOOLS 20020-22060 Ultra Quiet & Oil-Free Air Compressor is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 70 decibels of sound.



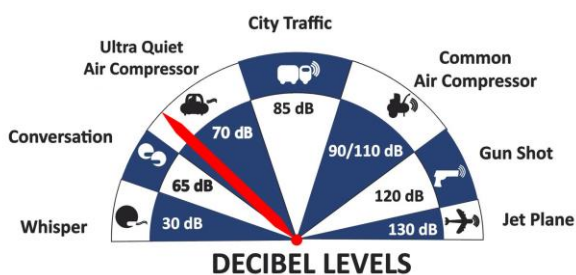

The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 70 DB NOISE LEVEL

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-20020 Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours compared to other comparable air compressors with life cycles of 500 hours or less.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).


The large 20 Gallon Steel Air Tank is designed to store more air for higher demand air tools such as spray guns and sanders.
Perfect for the shop or garage.

The 2 (no flat) wheels and handle makes moving this air compressor very easy.

EASY START VALVE

The Easy Start Valve feature allows for a easier start up using less starting amps. The Easy Start Valve releases a small amount of air from the pump at start up to produce a no-load condition allowing the motor to spin freely. This no-load start up requires less amps for a easier start up in cold temperatures.

Easy Start Valve

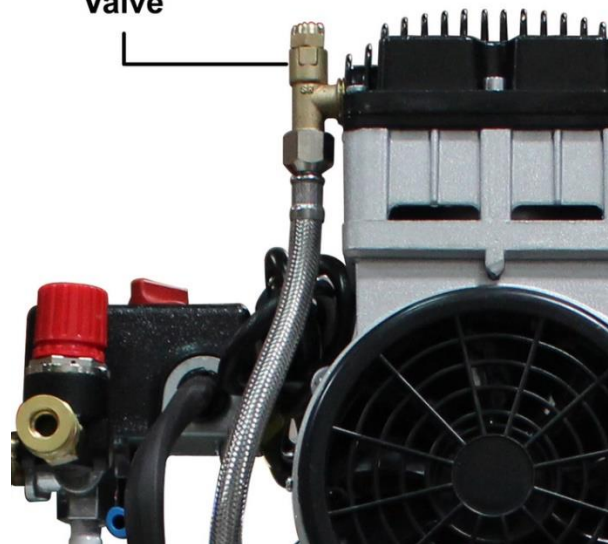



Ultra-Quiet Motor/Pump - Only 70 Decibels

Easy Start Valve for Low Amp Draw

4 Pole - Induction Motor

Long Life

Oil-Free Dual Piston Pump

Teflon Cylinder Rings

Stainless Reed Valves

Tank Pressure Gauge

Sturdy Steel Air Tank

Large 20 Gallon Air Tank


Easy Drain Ball Valve

Durable "No Flat" Wheels

Regulated Pressure Gauge

Air Pressure Regulator Knob

Industrial "Push to Connect" Quick Connectors

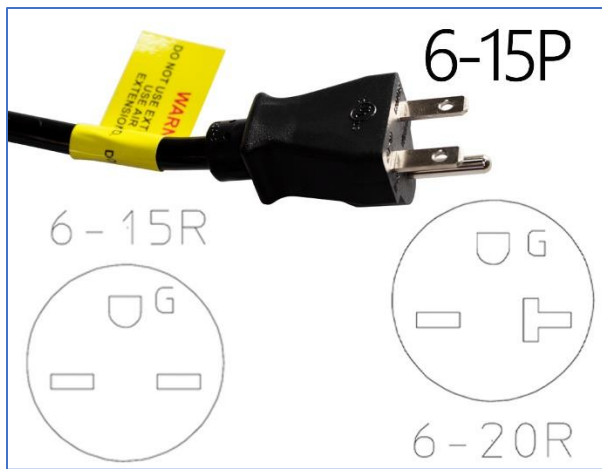

FEATURES

- * **Ultra Quiet** - Only **70 decibels**
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * Two - Female industrial "Push to Connect" quick connectors
- * Easy Start Valve - For Less Starting Amperage
- * Pressure Switch
- * Thermal Overload Protector
- * 125 PSI Maximum Pressure
- * 110v / 60 hz
- * Low Amp Draw - 14 Amps
- * Dedicated 15-amp outlet -14-gauge 25ft cord - Min. 5500-Watt Generator
- * Time to fill tank from empty to full - 4.00 Minutes
- * Recovery time from 95 PSI to 125 PSI -1.00 Minute
- * Duty Cycle - 70/30*
- * Maximum continuous running 30-60 min. (Depending PSI & CFM)
- * Less heat which dissipates more efficiently.
- * 20 Gal. Steel Air Tank
- * Wheel Kit (no flat) and (2) Air Filters
- * L (20") x W/D (20") x H (45")
- * 114 lbs
- * Non-ASME Air Tank
- * 1 Year Limited Warranty
- * Commercial Use: Refer to State & City Codes
- * Manufactured in Mexico

For more information and to watch a 20020-22060 product demonstration please visit California Air Tools: <https://www.californiaairtools.com/contractor-grade-ultra-quiet-series-of-air-compressors/2-0-hp-air-compressors/cat-20020-22060/>

Manufactured in Mexico using global components.

MODEL: 20020-22060

PART NUMBER: CAT-20020-22060

www.californiaairtools.com

Revision A: 07-2024