



CALIFORNIA AIR TOOLS 10020SPCAD-H Ultra Quiet and Oil-Free 2.0 Hp Air Compressor in Sound Proof Cabinet w/Automatic Drain Valve and 10' Drain Hose



2.0 HP
(Rated/Running)


10.0 Gallon Steel
Tank

6.40 CFM @ 40 PSI

5.30 CFM @ 90 PSI

The CALIFORNIA AIR TOOLS 10020SPCAD-H Ultra Quiet & Oil-Free Air Compressor in Soundproof Cabinet is designed to be one of the quietest 2.0 Hp air compressors in the industry having only 58 decibels of sound.



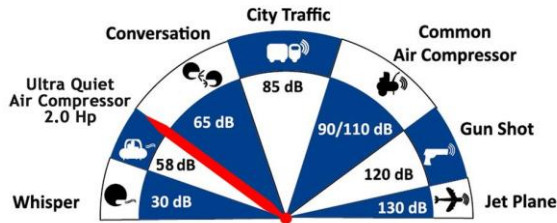

The powerful 2.0 HP motor operates at only 1680 RPM creating less noise, vibration and creating less wear.

ULTRA QUIET

ONLY 58 DB NOISE LEVEL

The SP Series of Ultra Quiet Air Compressor Motors have been designed to increase duty cycle and allow for longer continuous run times. *

The Oil-Free Dual Piston Pump System is engineered for high performance and durability.

The CAT-10020SPCAD-H Air Compressor has a Oil-Free Dual Piston pump designed to have a life cycle before wear of 3000 Plus hours.

The Oil-Free pump allows for use in a variety of temperatures (cold starts) and uneven terrains (no oil in the pump).

SOUNDPROOF CABINET

The cabinet has two latching doors that allow for easy access to the compressor and components.

The two cabinet exhaust fans are used to remove the air from the cabinet to a cool working condition for the air compressor.

The 4 caster wheels makes moving the air compressor from location to location very easy.



The Soundproof Cabinet is made of a sturdy metal frame with 1/4" Acoustic Sound Proofing Foam insulation to reduce the noise by 30%.

8 mm PTFE black tubing (10') is included for connection to the Automatic Drain Valve which periodically removes water from the 10-gallon tank.



FEATURES

**Easy Start
Valve**

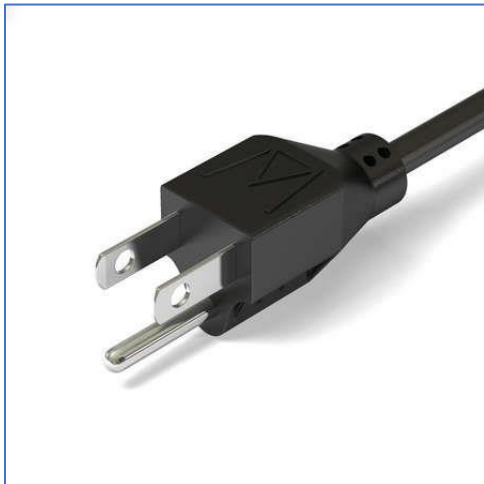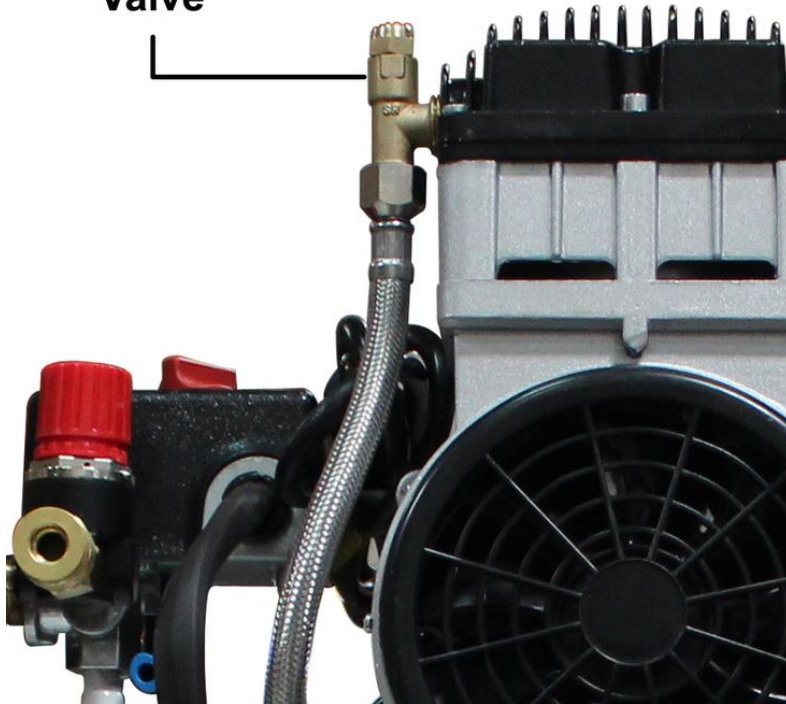



- * **Ultra Quiet** - Only **58 decibels**
- * Oil-Free Pump - Cleaner air for better tool operation.
Less maintenance and Costs.
- * Two pressure control gauges
- * One - Female industrial "Push to Connect" quick connector (1/4" NPT)
- * Easy Start Valve - For Less Starting Amperage
- * EZ-1-2321 Auto Drain Valve Factory Installed
- * 8mm PTFE black tubing, 10'
- * Condor Pressure Switch
- * Thermal Overload Protector
- * 130 PSI Maximum Pressure
- * 110v / 60 hz
- * Low Amp Draw - 14 Amps
- * Time to fill tank from empty to full - 130 Seconds
- * Recovery time from 100 PSI to 130 PSI - 40 Seconds
- * Duty Cycle - 70/30*
- * Less heat which dissipates more efficiently.
- * 10 Gal. Steel Air Tank with Soundproof Cabinet and Swivel Caster wheels
- * L (21") x W (26") x H (32)
- * 146 lbs
- * 1 Year Limited Warranty
- * Commercial Use: Refer to State & City Codes
- * Non-ASME Air Tank
- * Assembled in USA with global components

For more information and to watch a 10020SPCAD-H product demonstration please visit California Air Tools:

<https://www.californiaairtools.com/sound-proof-cabinet-ultra-quiet-air-compressors/cat-10020spcad-h/>

Manufactured in Mexico using global components.

MODEL: 10020SPCAD-H

PART NUMBER: CAT-10020SPCAD-H

www.californiaairtools.com

Revision A: 07-2024